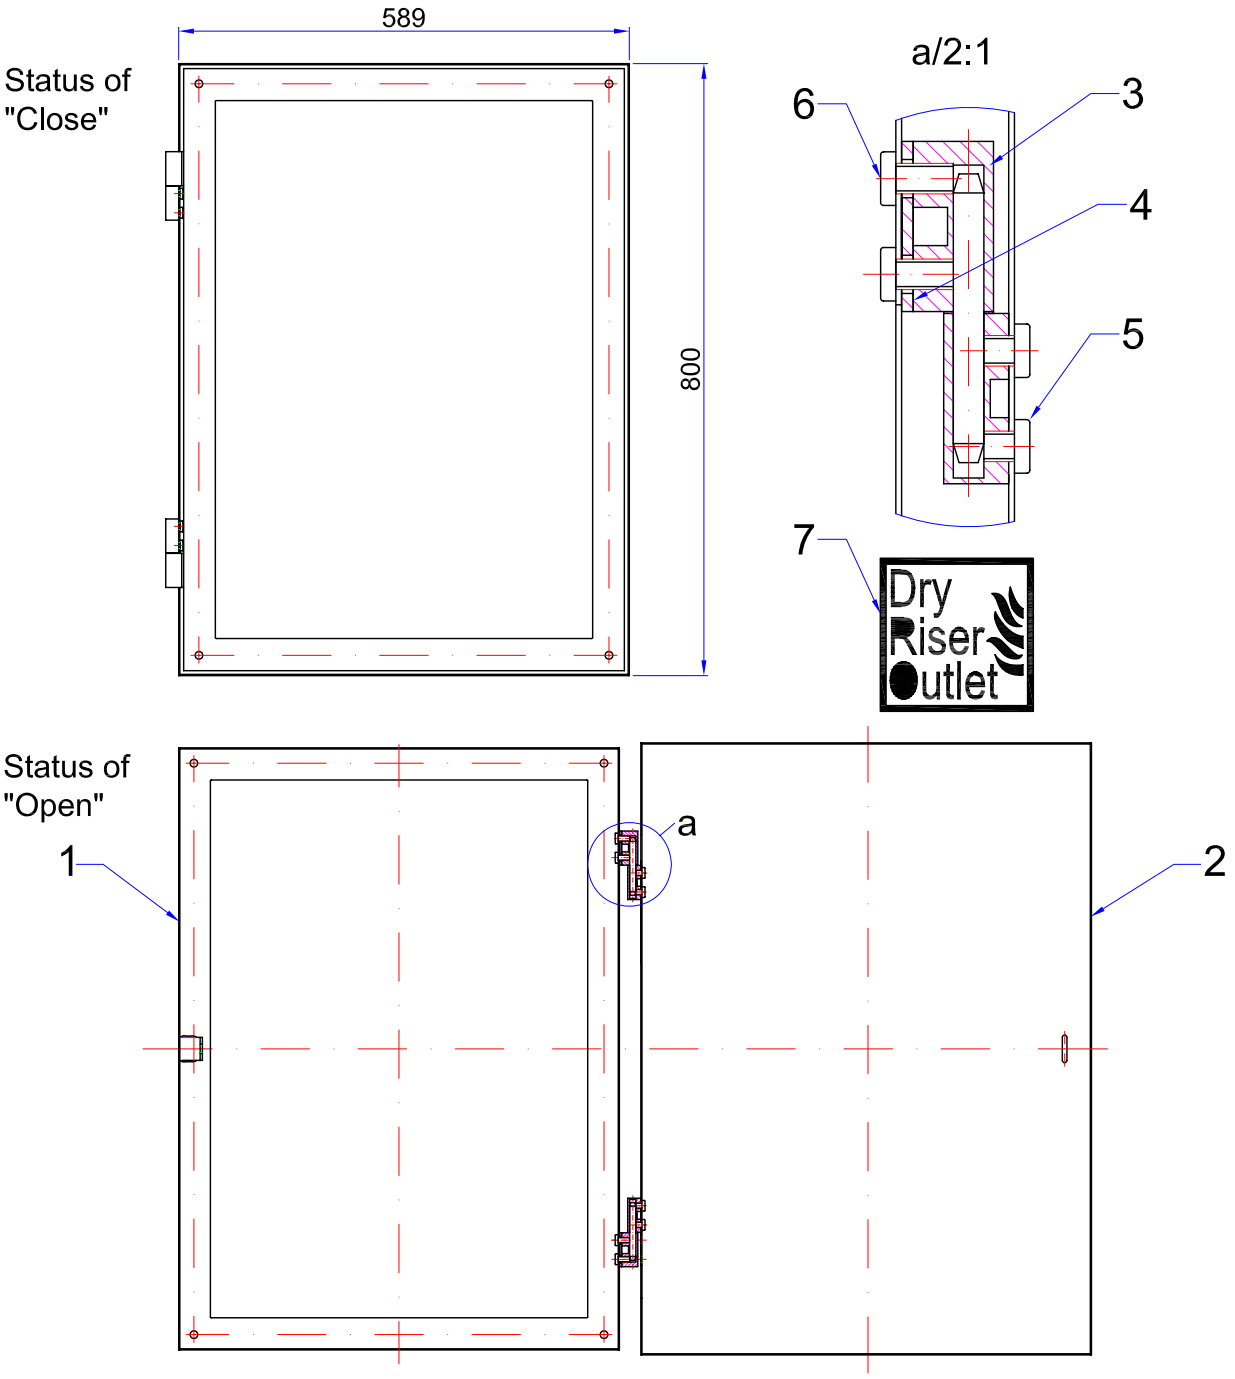


Technical Requirements:

1. During assembly, collision and damage shall be avoided to affect appearance quality.
2. The door frames shall be opened and closed flexibly and its opening angle at least achieve 270°.

No.	Drawing No.	Name	Q'TY	Material	Weight	Remark
7	DLX01-036-03-Y01	Label	1	PVC		
6		Cross recessed countersunk head screw	4	steel(M8×L14)		zinc plated
5		Cross recessed countersunk head screw	4	steel(M8×L8)		zinc plated
4		backing plate	2	steel		red painted
3	DLX02-065	Hinge	2	Assembly		
2	DLX01-052-02	Door panel	1	Cold rolled lowcarbon steel sheet		red painted
1	DLX01-052-01	Door frame	1	Cold rolled lowcarbon steel sheet		red painted

Zone	Revision note	Signature	Date
Drawn		Audit	
Checked		Approved	

Vandal Proof Door(vertical)

Assembly

DWG No. DLX01-052-00

Customer or Manu. DWG No.

W.T. 8.1Kg | Scale 1:10

Hydrotech